

BRACING & TENSIONING

Bracing made for use in Australia to suit the local conditions and comply with relevant Standards

KEY FEATURES

Confidence in Quality

Our Australian Made builder's strapping is industry proven for Australian conditions. Along with all other VUETRADE products, they go through our strict Quality Control procedures to ensure that when on-site you are not disappointed or non-compliant.



Connector plate nails to suit our strap bracing

VUETRADE 30 x 2.8mm suit all VUETRADE framing connectors except for the I-Beam hangers.



Compliant and Informative


All VUETRADE products are referenced to their relevant compliance and installation limitations that should be considered before installation. To assist in this, we provide installation guides within each Technical Data Sheet (TDS) available on each relevant product page on our website **vuetrade.com**



Find our growing Australian Made product range

Look for the green and gold kangaroo present on all of our Australian Made products.

SPECIFICATION AREA CHART

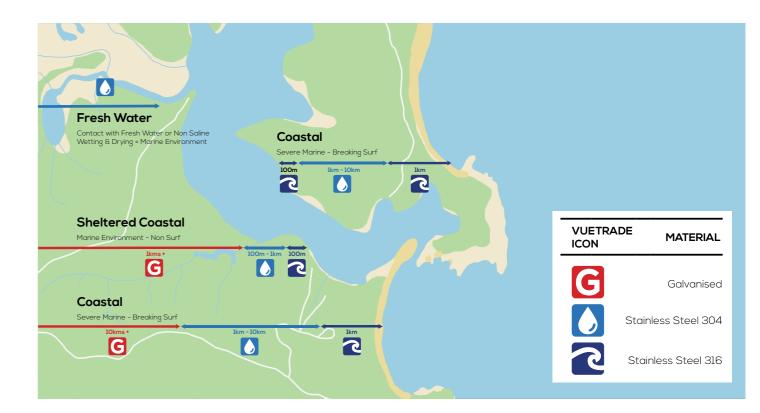

The right material for your location.



If you are in a higher corrosion area, it is worth considering to either enclose your timber connectors, or pick a more suitable grade of steel for this kind of environment.



STANDARD / GALVANISED

- Internal / enclosed
- Exterior/exposed inland areas except if in contact with fresh water or nonsaline wetting & drying

MARINE ENVIORNMENT




- Marine Environment 100m up to 1km from a non-surf coast and from 1km up to 10km from a surf coast
- External applications in contact with freshwater or subject to non-saline wetting and drying
- Minimum steel grade required Stainless Steel 304





SEVERE MARINE

- Severe Marine 100m from a non-surf coast and up to 1km from a surf coast
- Minimum Steel Grade Stainless Steel 316
- No 'Tea Staining', a superficial 'rust' look that occurs on lower grades of Stainless Steel including 304.

BRACING & TENSIONING RANGE

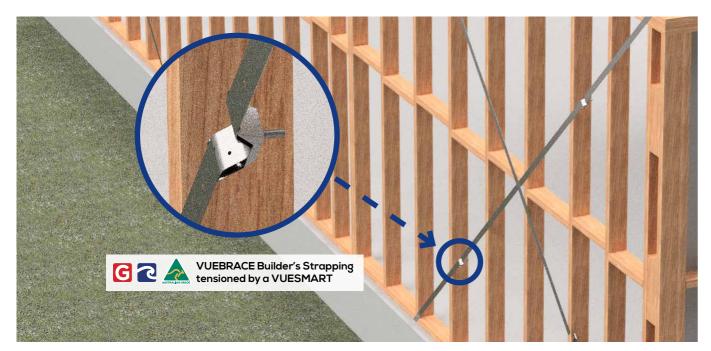

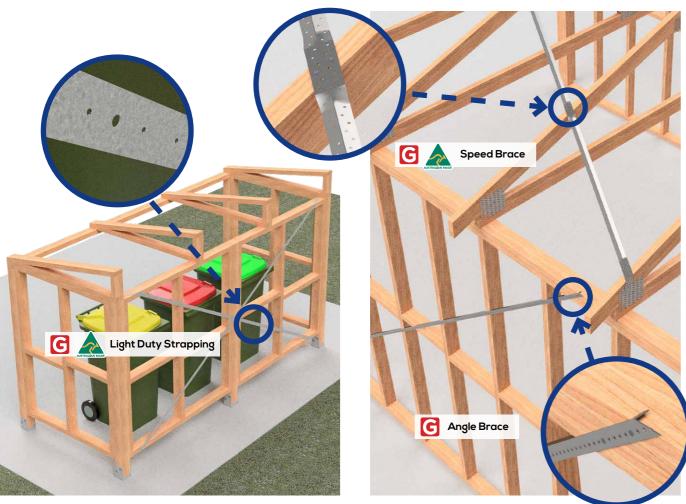

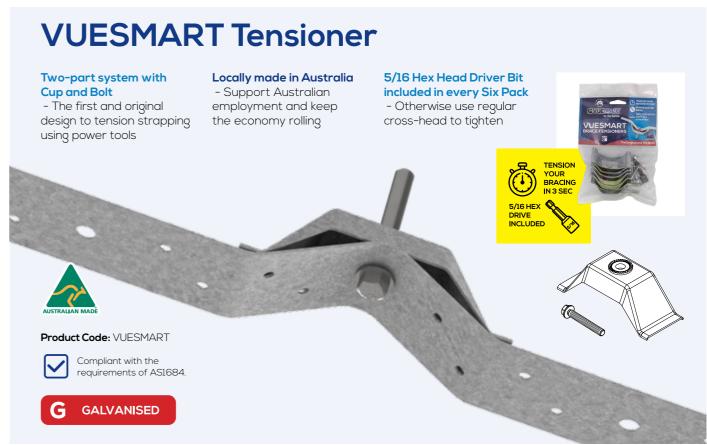




Light Duty Strapping

Non-structural applications

- Cost effective solution for no heavy load and minimal wind uplift scenarios

Repeated punched pattern

- Use VUESMART tensioner and 30x2.8mm nails conveniently



Product Code: VB25



Suitable for light duty non-strucutral applications.



Neatly Coiled Lengths

- Useful lengths rolled into a coil made for easy transport and ideal for many projects

25x0.6mm and 25x0.8mm

- Two sizes to suit your project needs, available in coils lengths of 6.0m, 15.0m and 30.0m

Unpunched Strapping

Flat undisturbed surface


- Better aesthetic finish for locations where the bracing would be exposed, widely used in pre-fab markets

30m and 50m lengths

- Long coils for large projects in either 0.8mm and 1.0mm thickness

Higher tensile capacity compared to punched strapping

- Great for general use projects where higher load ratings are required





Compliant with the requirements of AS1684 for non-bracing applications.




Australian Made

- Made locally, supporting the Australian economy and jobs now and into the future

Galvanised Finish

VUEBRACE UNPUNCH

- Durable and long-life installation when used in enclosed and in non-corrosive environments

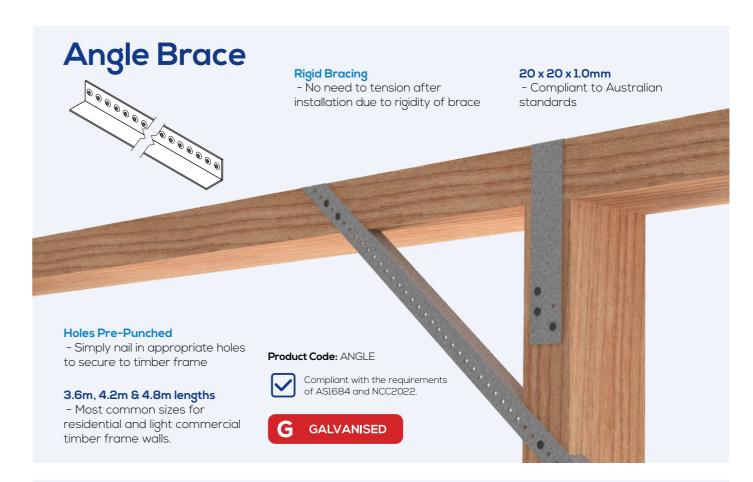





?

STAINLESS STEEL 316

BRACING & TENSIONING

VUESMART TENSIONER
PUNCHED BUILDER'S STRAPPING
LIGHT DUTY STRAPPING
UNPUNCHED STRAPPING
ANGLE BRACE
SPEED BRACE









Other category documents:









VUETRADE.

1300 850 520 www.vuetrade.com customercare@bellevuegroup.com.au