



STAINLESS STEEL 90mm BOLT DOWN POST SUPPORTS


OCT26

Compliant with the requirements of AS1720.

304 STAINLESS STEEL

316 STAINLESS STEEL

BOLTED TO CONCRETE

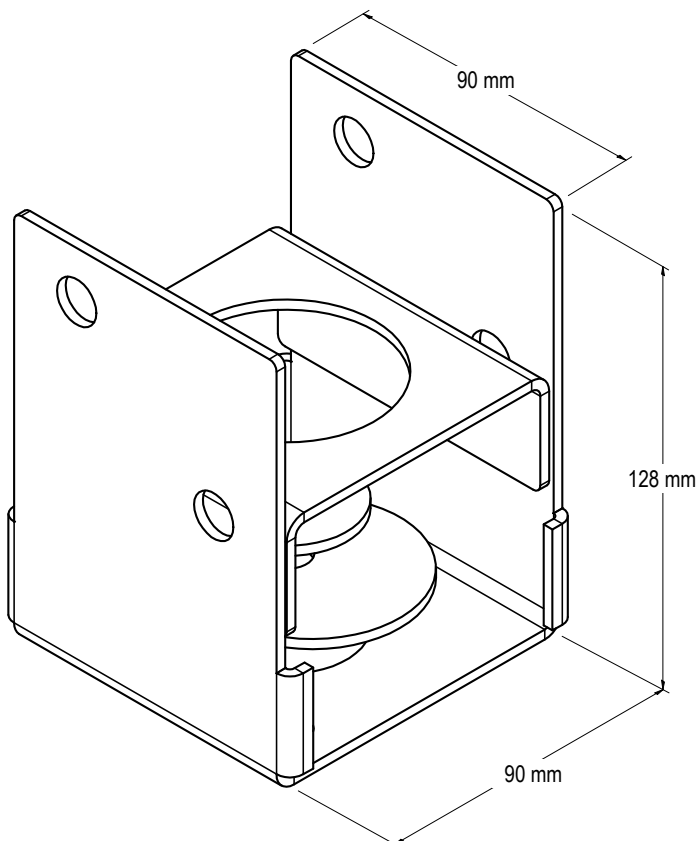

APPLICATION

Stainless Steel Bolt Down Post Supports are anchors ideal for bolting down timber posts in coastal areas.

SPECIFICATION

VUETRADE Stainless Steel Bolt Down Post Supports are manufactured from Stainless Steel 304 or 316 in 1.5mm thickness. It can be installed to conceal or open the gap that shows bolts and washers within the post support.

FASTENERS

Saddle: 2x Stainless Steel VUEBOLT or appropriate M12 bolts with hex nuts

Base: **Method 1:** 1x M12 concrete bolt or equivalent fastened with supplied washers, **OR:**

Method 2: 2x M12 concrete bolts or equivalent fastened to designated bolt holes

Only use stainless steel fasteners (bolts) with stainless steel post support, usage of other steel materials may lead to bimetallic corrosion.

SIZES

Product Code	Size (mm)	Material
VBPS90SS	90	SS 304
VBPS90SS316	90	SS 316

NOTE:

'Tea-staining' is a cosmetic issue with some VUETRADE Stainless Steel Post Supports (more prevalent in SS304) but this does not affect the structural integrity or material lifetime of the post support.







STAINLESS STEEL 90mm BOLT DOWN POST SUPPORTS

OCT26

INSTALLATION GUIDE AND BOLT FIXING SCHEDULE

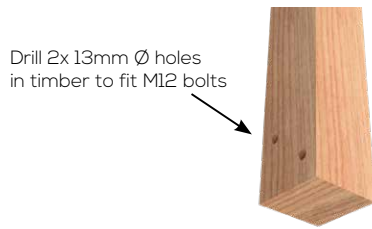


METHOD 1

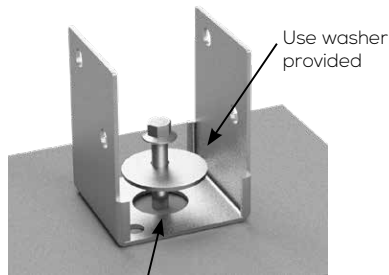


Install 1x M12 concrete bolt or
equivalent to ground


METHOD 2



Install 2x M12 concrete bolts
or equivalent to ground

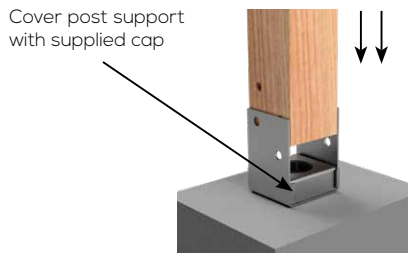

Slide timber to
post support

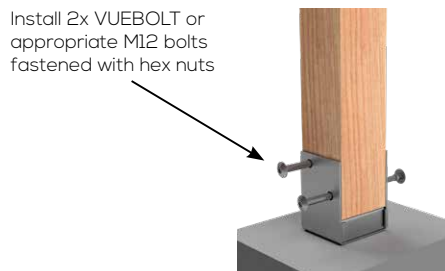

NOTES:

- Method 1 is suitable when a larger tolerance of adjustment is needed after bolt holes are drilled. Washers are used in this fixing type to provide hold down strength to post support.
- Method 2 is suitable when precise fixing and excellent holding strength are desired.
- Ensure that suitable M12 concrete bolts are used when bolting post support to ground.
- VUEBOLT may be used as an alternative to standard M12 bolts when fixing post support to timber posts for a concealed and smooth finish.

DESIGN CAPACITY DATA

Table 1: Design capacities for
Stainless Steel 90mm Bolt Down Post Support

Load Case	Design Capacity, Ndj (kN)		
	JD3	JD4	JD5
Uplift capacity	10.3	8.3	7.2

NOTES:

- Design capacity in Table 1 applies to VUETRADE Stainless Steel 90mm Bolt Down Post Supports where 2x M12 SS VUEBOLTS / appropriate bolts are installed and tightly fastened with hex nuts.
- Timber posts must have minimum dimensions of 90mm by 90mm section and shall be installed flat to the provided concealing cap of the post support.
- Footings by others.
 - Design capacities for post supports bolted or cast into concrete assumed that there is sufficient anchorage to resist wind uplift.
 - Design capacity of this post support may be limited by the withdrawal tensile capacity of concrete bolts used to fasten post support to concrete ground. Ensure that suitable concrete bolts are used for above design capacities to be valid.
- Design capacities in the above table are for wind uplift (vertical force direction) only and are obtained under strict in-house test conditions defined by AS1649:2025 - Timber - Methods of test for mechanical fasteners and connectors & uplift capacity requirements outlined in AS1720.1-2010 - Timber structures, Part 1: Design methods.
- VUETRADE Post Supports should only be used to resist wind uplift / dead load as specified in the TDS and should not be assumed to provide lateral stability. Sufficient bracing should be provided and approved by a structural engineer for lateral stability.
- Design capacity in Table 1 are based on Category 1 joints where it is applicable for failures that would be unlikely to affect an area of greater than 25m². For Category 2 and Category 3 joints, design capacities in this table are modified by multiplying 0.941 and 0.882 respectively.

